

- Installation height: 13 mm without plaster
- 10 mm x 1.3 mm PE-RT heating pipe
- Oxygen-tight according to DIN 4726
- Spacing between heating pipes: 75 mm
- Installation with plug-in connectors
- Connection to conventional heating systems with RTL technology
- Suitable for all plaster materials approved by the manufacturer for radiant heating systems. E.g. gypsum plaster, lime plaster or clay plaster.

Heating capacity [W/m²]

Average heating water temperature*	28°C		32°C		37°C		42°C	
Room temperature	20°C	24°C	20°C	24°C	20°C	24°C	20°C	24°C
Heating capacity [W/m ²]**	42	20	65	42	96	71	127	102

* for FLEXIRO wall heating, a ΔT of 5K between flow and return is recommended.

** Data for gypsum plaster with 15 mm pipe overlap. The heating capacity data in the table are for orientation and are not necessarily valid for the design in individual cases.

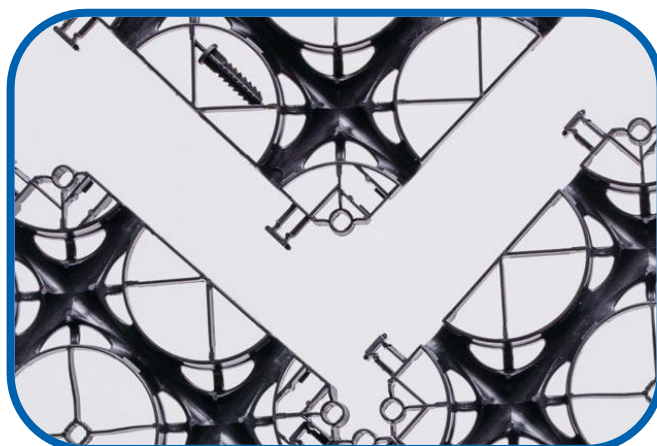


Plate dimensions

Honeycomb element: 150 x 150 x 13 mm

The individual honeycombs can be assembled as desired to form larger areas by means of click connections.